

DECLARATION OF PERFORMANCE

DoP Nr.: **Sikla-1.1-301_en**

Unique identification code of product-type: **Sikla Drop-in Anchor AN / AN ES**

Intended use/es: Mechanical fastener for use in concrete, see Annex B

Manufacturer: Sikla Holding GmbH
Kornstraße 4
4614 Marchtrenk - Österreich

System/s of AVCP: 1

European Assessment Document: **EAD 330232-01-0601**
 European Technical Assessment: **ETA-10/0257, 23.11.2021**
 Technical Assessment Body: DIBt, Berlin
 Notified body/ies: NB 2873 – Technische Universität Darmstadt

Declared performance/s:

Essential characteristics	Performance
Mechanical resistance and stability (BWR 1)	
Characteristic resistance to tension load (static and quasi-static loading) Method A	Annex B2, C1-C2
Characteristic resistance to shear load (static and quasi-static loading)	Annex C3 - C4
Displacements	Annex C5
Durability	Annex B1
Characteristic resistance and displacements for seismic performance category C1 and C2	NPD
Safety in case of fire (BWR 2)	
Reaction to fire	Class A1
Resistance to fire	NPD

The performance of the product identified above is in conformity with the set of declared performance/s.
 This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:



Günter Brugger
(Head of IPRM)

Villingen-Schwenningen 12.10.2022



Achim Münch
(Head of Management Systems)



The original of this declaration of performance was written in German. In the event of deviations in the translation, the German version shall be valid.

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads

Base materials:

- Compacted, reinforced or unreinforced normal weight concrete, without fibres according to EN 206:2013 + A1:2016
- Uncracked concrete
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials)
- For all other conditions applies:
Use according to EN 1993-1-4:2015 corresponding to corrosion resistance class CRC according to Annex A2, Table A1:
 - Stainless steel A4: CRC III
 - High corrosion resistant steel HCR: CRC V
- Anchor types M6x30 A4 and M8x30 A4 only for dry internal exposure

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- The strength class and the length of the fastening screw or threaded rod shall be defined by the designing engineer
- Design of fastenings according EN 1992-4:2018 (and TR 055, Edition February 2018, if necessary)
- Anchor sizes M6x30, M8x30 and M10x30 for statically indeterminate structural components only, when in case of failure, the load can be distributed to other fasteners.

Installation:

- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools
- Drill hole by hammer drilling or vacuum drilling

SIKLA Drop-in Anchor AN / AN ES

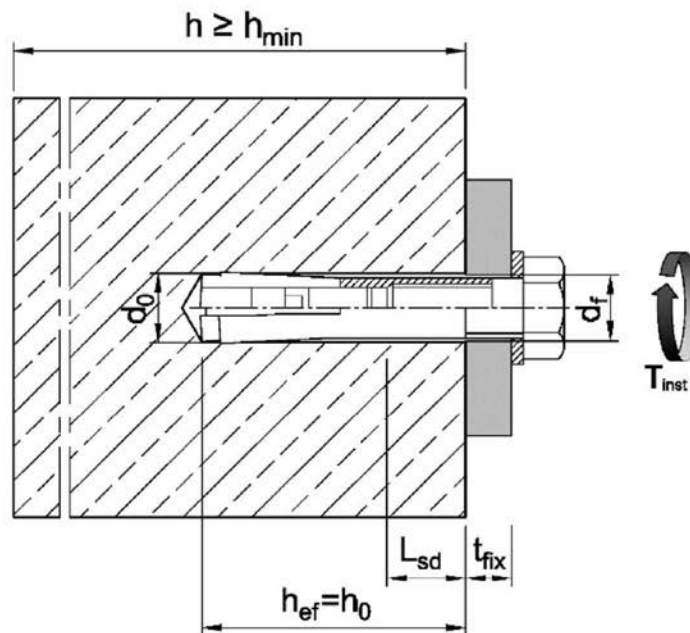
Intended use
Specifications

Annex B1

Table B1: Installation parameters

Anchor size		M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x80	M16x65	M16x80	M20x80
Depth of drill hole	$h_0 =$ [mm]	30	30	40	30	40	50	80	65	80	80
Drill hole diameter	$d_0 =$ [mm]	8	10	10	12	12	15	15	20	20	25
Cutting diameter of drill bit	$d_{cut} \leq$ [mm]	8,45	10,45	10,45	12,5	12,5	15,5	15,5	20,55	20,55	25,55
Max. installation torque ¹⁾	$T_{inst} \leq$ [Nm]	4	8	8	15	15	35	35	60	60	120
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]	7	9	9	12	12	14	14	18	18	22
Thread length	L_{th} [mm]	13	13	20	12	15	18	45	23	38	34
Minimum screw-in depth	L_{sdmin} [mm]	7	9	9	10	11	13	13	18	18	22
Steel, zinc plated											
Minimum thickness of member	h_{min} [mm]	100	100	100	120	120	130	130	160	160	200
Minimum spacing	s_{min} [mm]	55	60	80	100	100	120	120	150	150	160
Minimum edge distance	c_{min} [mm]	95	95	95	115	135	165	165	200	200	260
Stainless steel A4, HCR											
Minimum thickness of member	h_{min} [mm]	100	100	100	-	130	140	140	160	160	250
Minimum spacing	s_{min} [mm]	50	60	80	-	100	120	120	150	150	160
Minimum edge distance	c_{min} [mm]	80	95	95	-	135	165	165	200	200	260

¹⁾ If the screw or threaded rod is otherwise secured against unscrewing, the torque can be omitted

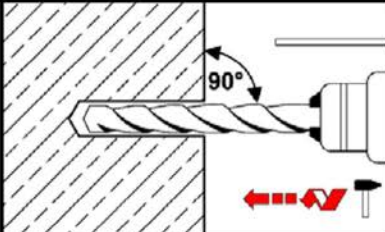
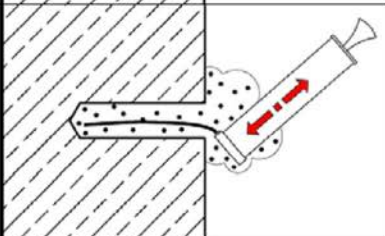
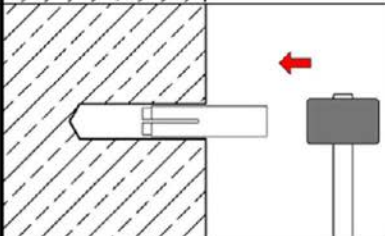
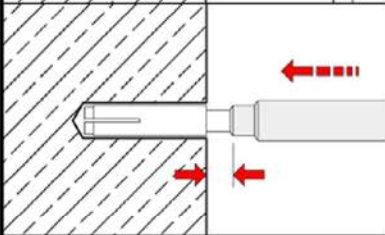
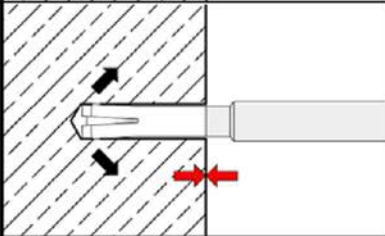
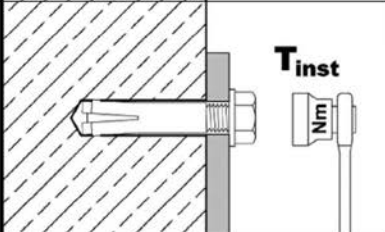


SIKLA Drop-in Anchor AN / AN ES

Intended use
Installation parameters

Annex B2

Installation instructions

1		<p>Drill hole perpendicular to concrete surface. Using vacuum drill bit proceed with step 3.</p>
2		<p>Blow out dust. Alternatively, vacuum clean down to the bottom of the hole.</p>
3		<p>Drive in anchor.</p>
4		<p>Drive in cone by using setting tool.</p>
5		<p>Shoulder of setting tool must fit on anchor rim.</p>
6		<p>Turn in screw or threaded rod with nut, observe minimum screw-in depth (see Annex B2). Apply installation torque T_{inst}.</p>

SIKLA Drop-in Anchor AN / AN ES

Intended use
Installation instructions

Annex B3

Table C1: Characteristic values for tension loads, zinc plated steel

Anchor size			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x80	M16x65 M16x80	M20x80			
Installation factor	γ_{inst}	[-]	1,2											
Steel failure														
Characteristic resistance	property class	$N_{Rk,s}$	[kN]	4.6	8,0	14,6		23,2		33,7		62,8	98,0	
				4.8	8,0	14,6		18,0	20,2	33,7		62,8	98,0	
				5.6	10,0	18,3		18,0	20,2	42,1		78,3	122,4	
				5.8	10,0	17,6	18,3	18,0	20,2	40,2	42,1	67,1	106,4	
				8.8	15,0	17,6	19,9	18,0	20,2	40,2	43,0	67,1	106,4	
Partial factor	property class	$\gamma_{Ms}^{1)}$	[-]	2,0										
				2,0			1,5		2,0					
				1,5								1,6		
				1,5								1,6		
				1,5								1,6		
Pull-out failure														
Characteristic resistance in concrete C20/25	$N_{Rk,p}$	[kN]	8,1	8,1	9,0	8,1	12,4	17,4	17,4	25,8	35,2			
Increasing factor $N_{Rk,p} = \psi_c \cdot N_{Rk,p} (C20/25)$	ψ_c	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$		$\left(\frac{f_{ck}}{20}\right)^{0,3}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$								
Splitting														
Characteristic resistance in concrete C20/25	$N^0_{Rk,sp}$	[kN]	min ($N_{Rk,p}$; $N^0_{Rk,c}$)											
Characteristic edge distance	$C_{cr,sp}$	[mm]	95	95	95	115	135	165		200	260			
Characteristic spacing	$S_{cr,sp}$	[mm]	$2 \cdot C_{cr,sp}$											
Concrete cone failure														
Effective anchorage depth	h_{ef}	[mm]	30	30	40	30	40	50	80	$\frac{65}{80}^{2)}$	80			
Characteristic edge distance	$C_{cr,N}$	[mm]	$1,5 h_{ef}$											
Characteristic spacing	$S_{cr,N}$	[mm]	$2 \cdot C_{cr,N}$											
Factor	uncracked concrete	$k_{ucr,N}$	11,0											
	cracked concrete	$k_{cr,N}$	No performance assessed											

1) In absence of other national regulations

2) For M16x80

SIKLA Drop-in Anchor AN / AN ES

Performance
Characteristic values for tension loads, zinc plated steel

Annex C1

Table C2: Characteristic values for tension loads, stainless steel A4, HCR

Anchor size				M6x30	M8x30	M8x40	M10x40	M12x50 M12x80	M16x65 M16x80	M20x80
Installation factor	γ_{inst}	[-]		1,0						
Steel failure										
Characteristic resistance (property class 70)	$N_{Rk,s}$	[kN]	14,1	23,3	29,4	50,2	83,8	133,0		
Characteristic resistance (property class 80)	$N_{Rk,s}$	[kN]	17,5	23,3	29,4	50,2	83,8	133,0		
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,87							
Pull-out failure										
Characteristic resistance in concrete C20/25	$N_{Rk,p}$	[kN]	8,1	8,1	11,0	12,4	17,4	25,8	35,2	
Increasing factor	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$		$\left(\frac{f_{ck}}{20}\right)^{0,3}$		$\left(\frac{f_{ck}}{20}\right)^{0,5}$			
Splitting failure										
Characteristic resistance in concrete C20/25	$N^0_{Rk,sp}$	[kN]	min ($N_{Rk,p}$; $N^0_{Rk,c}$)							
Edge distance	$C_{cr,sp}$	[mm]	80	95	95	135	165	200	260	
Spacing	$S_{cr,sp}$	[mm]	$2 \cdot C_{cr,sp}$							
Concrete cone failure										
Effective anchorage depth	h_{ef}	[mm]	30	30	40	40	50 80 ²⁾	65 80 ²⁾	80	
Edge distance	$C_{cr,N}$	[mm]	$1,5 h_{ef}$							
Spacing	$S_{cr,N}$	[mm]	$2 \cdot C_{cr,N}$							
Factor	uncracked concrete	$k_{ucr,N}$	11,0							
	cracked concrete	$k_{cr,N}$	No performance assessed							

¹⁾ In absence of other national regulations

²⁾ For M12x80 and M16x80

SIKLA Drop-in Anchor AN / AN ES

Performance
Characteristic values for **tension loads, stainless steel A4, HCR**

Annex C2

Table C3: Characteristic values for shear loads, zinc plated steel

Anchor size				M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x80	M16x65 M16x80	M20x80	
Steel failure without lever arm													
Characteristic resistance	property class	$V_{Rk,s}^0$	[kN]	4,0	7,3	11,6	9,6	16,8		31,3	49,0		
				4,0	7,3	10,1	10,1	16,9		31,3	49,0		
				5,0	9,1	10,1	9,6	21,1		39,2	61,2		
				5,0	6,9	10,1	7,2	19,4	21,1	33,5	53,2		
				5,0	6,9	10,1	7,2	19,4	21,5	33,5	53,2		
Partial factor	property class	γ_{Ms}^1	[-]	1,67									
				1,67			1,25	1,67					
				1,25									1,33
				1,25									1,33
				1,25									1,33
Duktilitätsfaktor			k_7	[-]									1,0
Steel failure with lever arm													
Characteristic bending resistance	property class	$M_{Rk,s}^0$	[Nm]	6,1	15	30		52		133	259		
				7,6	19	37		65		166	324		
				12	30	59	60	105		266	519		
				1,67									
Partial factor	property class	γ_{Ms}^1	[-]	1,67									
				1,25									
				1,25									
				1,25									
Factor of ductility			k_7	[-]									1,0
Concrete pry-out failure													
Pry-out factor			k_8	[-]					1,0	1,5	2,0		
Concrete edge failure													
Effective length of fastener in shear loading			l_f	[mm]	30	30	40	30	40	50	80	65 80 ²⁾	80
Outside diameter of fastener			d_{nom}	[mm]	8	10		12		15		20	25

¹⁾ In absence of other national regulations

²⁾ For M16x80

SIKLA Drop-in Anchor AN / AN ES

Performance
Characteristic values for **shear loads, zinc plated steel**

Annex C3

Table C4: Characteristic values for **shear loads, stainless steel A4, HCR**

Anchor size			M6x30	M8x30	M8x40	M10x40	M12x50	M12x80	M16x65	M16x80	M20x80
Steel failure without lever arm											
Characteristic resistance (property class 70)	$V_{Rk,s}^0$	[kN]	7,0	10,6	13,4	25,1	41,9	66,5			
Characteristic resistance (property class 80)	$V_{Rk,s}^0$	[kN]	8,7	10,6	13,4	25,1	41,9	66,5			
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,56								
Factor of ductility	k_7	[-]	1,0								
Steel failure with lever arm											
Characteristic bending resistance (property class 70)	$M_{Rk,s}^0$	[Nm]	11	26	52	92	233	454			
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,56								
Characteristic bending resistance (property class 80)	$M_{Rk,s}^0$	[Nm]	12	30	60	105	266	519			
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,33								
Factor of ductility	k_7	[-]	1,0								
Concrete pry-out failure											
Pry-out factor	k_8	[-]	1,0	1,7				2,0			
Concrete edge failure											
Effective length of fastener in shear loading	l_f	[mm]	30	30	40	40	50	80	65	80	80
Outside diameter of fastener	d_{nom}	[mm]	8	10		12	15		20		25

¹⁾ In absence of other national regulations

SIKLA Drop-in Anchor AN / AN ES

Performance
Characteristic values for **shear loads, stainless steel A4, HCR**

Annex C4

Table C5: Displacements under tension loads

Anchor size			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50 M12x80	M16x65 M16x80	M20x80
Steel, zinc plated										
Tension load in uncracked concrete	N	[kN]	3	3	3,6	3,3	4,8	6,4	10	14,8
Displacements	δ_{N0}	[mm]	0,24							
	$\delta_{N\infty}$	[mm]	0,36							
Stainless steel A4 / HCR										
Tension load in uncracked concrete	N	[kN]	4	4	4,3	- 1)	6,1	8,5	12,6	17,2
Displacements	δ_{N0}	[mm]	0,12							
	$\delta_{N\infty}$	[mm]	0,24							

1) Anchor version is not part of the ETA

Table C6: Displacements under shear loads

Anchor size			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50 M12x80	M16x65 M16x80	M20x80
Steel, zinc plated										
Shear load in uncracked concrete	V	[kN]	2	4	4	5,7	4,0	11,3	18,8	32,2
Displacements	δ_{V0}	[mm]	0,9	0,9	1,0	1,5	0,6	1,2	1,2	1,6
	$\delta_{V\infty}$	[mm]	1,3	1,3	1,5	2,3	0,9	1,9	1,9	2,4
Stainless steel A4 / HCR										
Shear load in uncracked concrete	V	[kN]	3,5	5,2	5,2	- 1)	6,5	11,5	19,2	30,4
Displacements	δ_{V0}	[mm]	1,9	1,1	0,7	- 1)	1,0	1,7	2,4	2,6
	$\delta_{V\infty}$	[mm]	2,8	1,6	1,0	- 1)	1,5	2,6	3,6	3,8

1) Anchor version is not part of the ETA

SIKLA Drop-in Anchor AN / AN ES

Performance
Displacements

Annex C5